




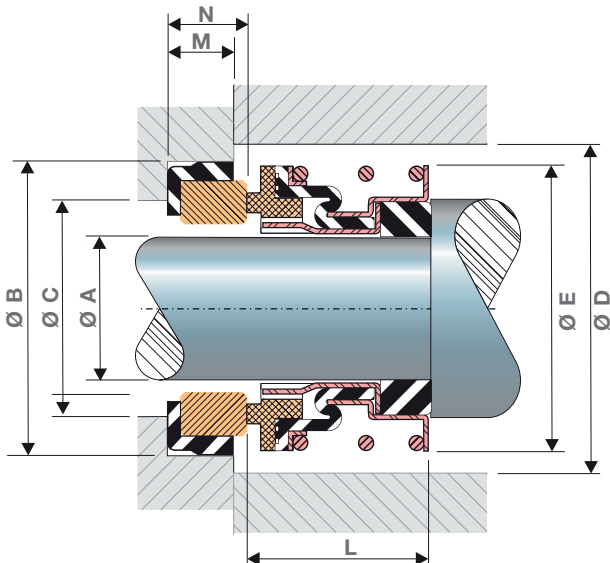




MATERIALES

-  **Partes Metálicas:** Acero Inoxidable 304, Latón
-  **Resortes:** Acero Inoxidable 304
-  **Caras:** C. Grafito, C. Fenólico, C. Silicio, C. Fenólico/Teflón
-  **Empaques:** Nitrilo, Vitón, Neopreno, E.P.R.
-  **Asientos:** Cerámica, C. Silicio, C. Tungsteno, Ni-Resist, Acero Inoxidable 316



DIMENSIONES

A	B	C	D	E	L	M	N
±0.002	±0.002	REF.	mínima	±0.015	±0.005	±0.005	±0.015
3/8	0.875	0.438	1.062	0.937	0.625	0.250	0.312
1/2	1.000	0.563	1.187	1.062	0.656	0.250	0.312
5/8	1.187	0.688	1.343	1.218	0.719	0.282	0.344
5/8	1.250	0.688	1.343	1.218	0.719	0.344	0.406
5/8	1.250	0.688	1.343	1.218	0.812	0.344	0.406
3/4	1.375	0.813	1.468	1.343	0.719	0.344	0.406
3/4	1.375	0.813	1.468	1.343	0.812	0.344	0.406
7/8	1.625	1.063	1.750	1.687	0.812	0.375	0.438
1	1.625	1.063	1.750	1.687	0.812	0.375	0.438

NOTA: Todas las medidas en pulgadas.
Dimensiones dentro de la norma ASTM

LIMITES DE OPERACIÓN

OPERACIÓN	LÍMITES
VELOCIDAD	3600 RPM
PRESIÓN	100 PSI