




MATERIALES

- Partes Metálicas:** Acero Inoxidable 304, Latón
- Resortes:** Acero Inoxidable 304
- Caras:** C. Grafito, C. Fenólico, C. Silicio, C. Fenólico/Teflón
- Empaques:** Nitrilo, Vitón, Neopreno, E.P.R.
- Asientos:** Cerámica, C. Silicio, C. Tungsteno, Ni-Resist, Acero Inoxidable 316, Acero Sinterizado

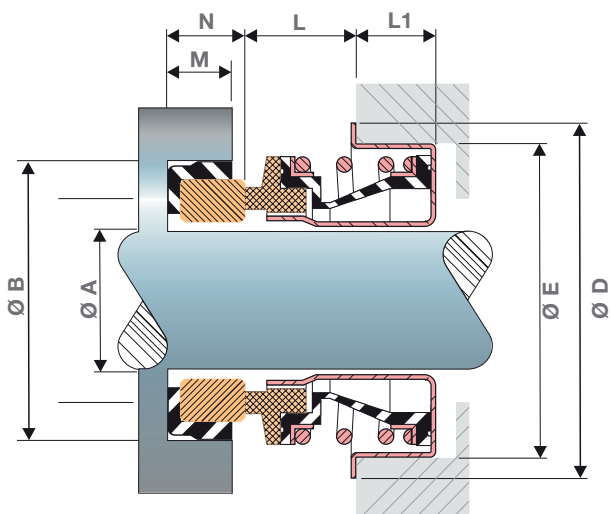

DIMENSIONES

A	B	D	E	L	L1	M	N
±0.002	±0.002	REF.	±0.002	±0.015	±0.005	±0.005	±0.015
1/2	1.000	1.320	1.130	0.188	0.345	0.250	0.312
5/8	1.250	1.625	1.440	0.265	0.345	0.344	0.406
3/4	1.375	1.719	1.575	0.235	0.375	0.344	0.406

NOTA: Todas las medidas son en pulgadas.

DIMENSIONES

A	B	D	E	L	L1	M	N
±0.05	±0.05	REF.	mínima	±0.38	±0.05	±0.12	±0.38
16a	31.00	41.50	36.45	6.80	8.00	4.00	5.00
16b	31.00	43.50	38.10	6.80	8.00	4.00	5.00
20	35.00	43.80	40.00	6.00	9.50	4.00	5.00
25S	44.00	51.00	46.00	8.00	10.00	6.00	7.00
25M	44.00	51.00	47.00	6.00	12.00	6.00	7.00
25L	48.00	57.00	52.00	6.00	12.00	6.00	7.00
30	48.00	57.00	52.00	8.00	11.00	7.00	8.00

NOTA: Todas las medidas son en milímetros.

LIMITES DE OPERACIÓN

OPERACIÓN	LÍMITES
VELOCIDAD	3600 RPM
PRESIÓN	100 PSI