




**CARACTERÍSTICAS**

|                               |                                |
|-------------------------------|--------------------------------|
| <b>Especificaciones</b>       | 1.2 MP a 10m/s -30° C - 200° C |
| <b>Cara Estacionaria</b>      | Cerámica / SIC / TC            |
| <b>Cara Rotativa</b>          | Carbón / SIC / TC              |
| <b>Sello Secundario</b>       | NBR / EPDM / VITON             |
| <b>Resorte y otras Partes</b> | S.S / SUS 304 / SUS 316        |

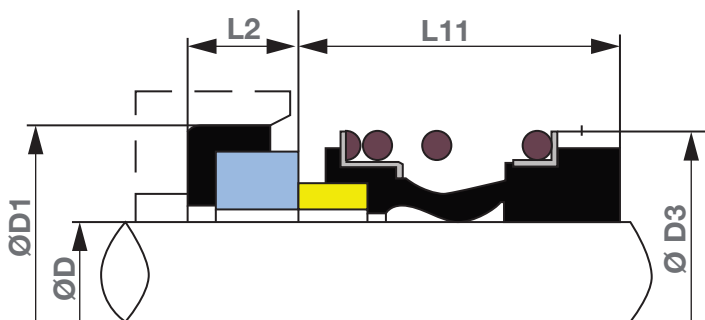

**DIMENSIONES**

| d   | D3    | D2    | D1    | L11  | L2   |
|-----|-------|-------|-------|------|------|
| 10  | 22.5  | 17.0  | 21.0  | 25.9 | 6.6  |
| 12  | 25.0  | 19.0  | 23.0  | 25.9 | 6.6  |
| 14  | 28.5  | 21.0  | 25.0  | 28.4 | 6.6  |
| 15  | 28.5  | -     | -     | 28.4 | -    |
| 16  | 28.5  | 23.0  | 27.0  | 28.4 | 6.6  |
| 18  | 32.0  | 25.0  | 33.0  | 30.0 | 7.5  |
| 19  | 37.0  | -     | -     | 30.0 | -    |
| 20  | 37.0  | 29.0  | 35.0  | 30.0 | 7.5  |
| 22  | 37.0  | 31.0  | 37.0  | 30.0 | 7.5  |
| 24  | 42.5  | 33.0  | 39.0  | 32.5 | 7.5  |
| 25  | 42.5  | 34.0  | 40.0  | 32.5 | 7.5  |
| 28  | 49.0  | 37.0  | 43.0  | 35.0 | 7.5  |
| 30  | 49.0  | 39.0  | 45.0  | 35.0 | 7.5  |
| 32  | 53.5  | 42.0  | 48.0  | 35.0 | 7.5  |
| 33  | 53.5  | 42.0  | 48.0  | 35.0 | 7.5  |
| 35  | 57.0  | 44.0  | 50.0  | 35.0 | 7.5  |
| 38  | 59.0  | 49.0  | 56.0  | 36.0 | 9.0  |
| 40  | 62.0  | 51.0  | 58.0  | 36.0 | 9.0  |
| 42  | 65.5  | -     | -     | 36.0 | -    |
| 43  | 65.5  | 54.0  | 61.0  | 36.0 | 9.0  |
| 45  | 68.0  | 56.0  | 63.0  | 36.0 | 9.0  |
| 48  | 70.5  | 59.0  | 66.0  | 36.5 | 9.0  |
| 50  | 74.0  | 62.0  | 70.0  | 38.0 | 9.5  |
| 53  | 78.5  | 65.0  | 73.0  | 36.5 | 11.0 |
| 55  | 81.0  | 67.0  | 75.0  | 36.5 | 11.0 |
| 58  | 85.5  | 70.0  | 78.0  | 41.5 | 11.0 |
| 60  | 88.5  | 72.0  | 80.0  | 41.5 | 11.0 |
| 65  | 93.5  | 77.0  | 85.0  | 41.5 | 11.0 |
| 68  | 96.5  | 81.0  | 90.0  | 41.2 | 11.3 |
| 70  | 99.5  | 83.0  | 92.0  | 48.7 | 11.3 |
| 75  | 107.0 | 88.0  | 97.0  | 48.7 | 11.3 |
| 80  | 112.0 | 95.0  | 105.0 | 48.0 | 12.0 |
| 85  | 120.0 | 100.0 | 110.0 | 46.0 | 14.0 |
| 90  | 127.0 | 105.0 | 115.0 | 51.0 | 14.0 |
| 95  | 132.0 | 110.0 | 120.0 | 51.0 | 14.0 |
| 100 | 137.0 | 115.0 | 125.0 | 51.0 | 14.0 |

NOTA: Todas las medidas son en milímetros.