





CARACTERÍSTICAS	
Especificaciones	1.6 MP a 20m/s -30° C - 200° C
Cara Estacionaria	Resin Carbón / SIC / TC
Cara Rotativa	SUS 316 / SIC / TC
Sello Secundario	NBR / EPDM / VITON
Resorte y otras Partes	S.S / SUS 304 / SUS 316

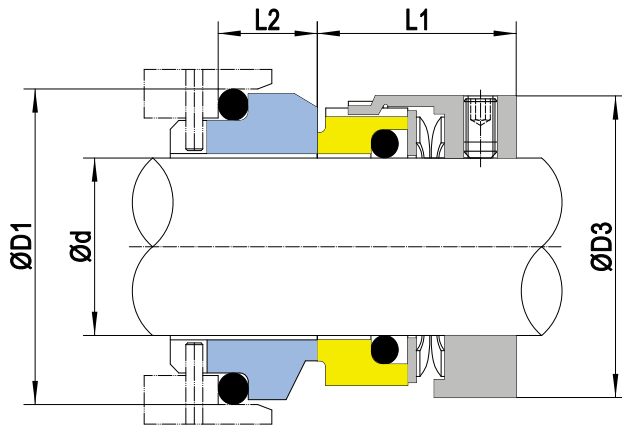

DIMENSIONES

d	D3	D1	L1	L2
14	25.0	25.0	25.0	10.0
16	27.0	27.0	25.0	10.0
18	33.0	33.0	26.0	11.5
20	35.0	35.0	26.0	11.5
22	37.0	37.0	26.0	11.5
24	39.0	39.0	28.5	11.5
25	40.0	40.0	28.5	11.5
28	43.0	43.0	31.0	11.5
30	45.0	45.0	31.0	11.5
32	47.0	48.0	31.0	11.5
33	48.0	48.0	31.0	11.5
35	50.0	50.0	31.0	11.5
38	55.0	56.0	31.0	14.0
40	57.0	58.0	31.0	14.0
43	60.0	61.0	31.0	14.0
45	62.0	63.0	31.0	14.0
48	65.0	66.0	31.0	14.0
50	67.0	70.0	32.5	15.0
53	70.0	73.0	32.5	15.0
55	72.0	75.0	32.5	15.0
58	79.0	78.0	37.5	15.0
60	81.0	80.0	37.5	15.0
63	84.0	83.0	37.5	15.0
65	86.0	85.0	37.5	15.0
68	89.0	90.0	34.5	18.0
70	91.0	92.0	42.0	18.0
75	99.0	97.0	42.0	18.0
80	104.0	105.0	41.8	18.2
85	109.0	110.0	41.8	18.2
90	114.0	115.0	46.8	18.2
95	119.0	120.0	47.0	17.2
100	124.0	125.0	47.0	17.2

NOTA: Todas las medidas son en milímetros.

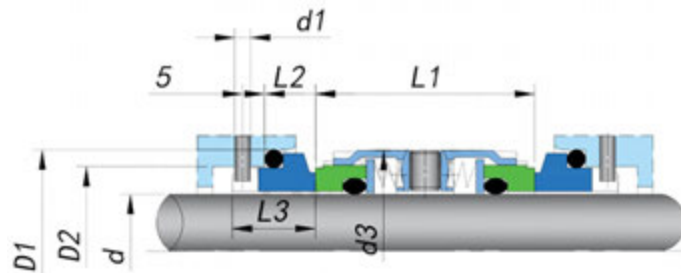

DIMENSIONES

d	D1	D2	D3	d1	L1	L2	L3
45.00	63.00	56.00	62.00	4.00	42.00	14.00	22.00

NOTA: Todas las medidas son en milímetros.